

Our material compositions are as individual as your requirements. The ideal composition of polyurethane, resin or rubber with the corresponding grain guarantees the perfect result. Regardless of whether initial equipment, tools with a long service life, economic variants or special glass: you decide what you need, we have the matching series.

THE DURABLE ONE: SERIES AO - Q

Regular aluminium oxide embedded in an extremely durable polyurethane bond ensures outstanding service lives.

EDGE PROFILES



Flat glass and arris

Miter 45°

Bevel

Laminated safety glass (LSG)

MACHINES

Single and double edger machines

TOOL

Product : ARTIFEX AO - Q6
Bonding : Foamed polyurethane
Grain : Aluminium oxide
40 | 60 | 80 | 120
Hardness : Medium elastic
Colour : Brown
Delivery form : Cup wheels with plate
Rings
Dimension : Ø 75 - 170 mm

RESULT


Good gloss

ADVANTAGES

Extremely long service life
Highest throughput

LSG

We offer this product series segmented with 3-mm or 5-mm slots for perfect laminated glass processing. Your advantage: no clogging of the cup wheels, no sticking of foil on the glass edges. This is how easy it is to process laminated glass.

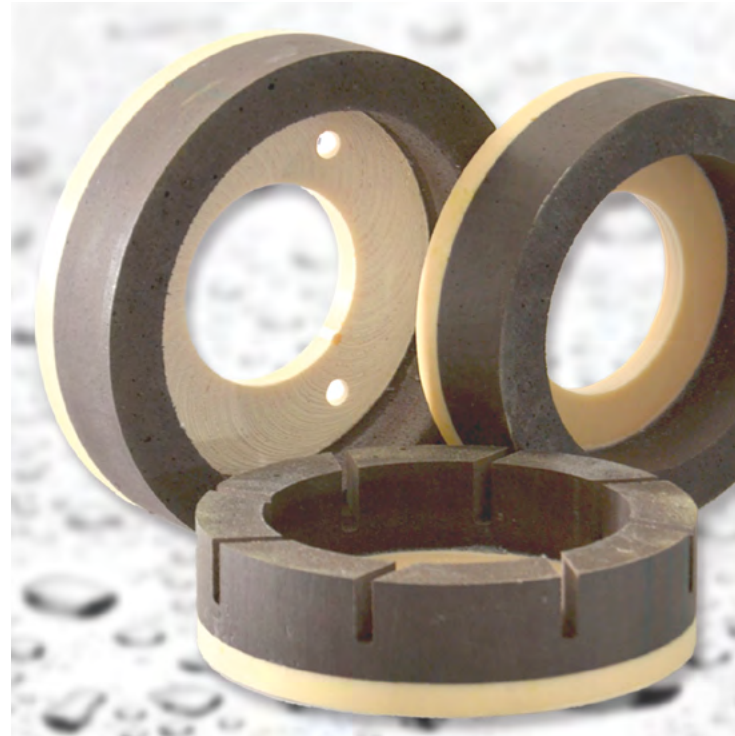

PRODUCT CODE EXAMPLE

Hardness : _____
Bonding : _____
Grain : _____
Type of grain : _____
ARTICLE : _____ AO 40 Q 6

The ARTIFEX promise

We stand for tools that guarantee the highest quality standards. All ARTIFEX products are „Made in Germany“ and their above-average service life speaks for itself.

Our service: You have individual requirements, we offer customised solutions regardless of the material, shape or dimensions. We will gladly advise you on your premises.