ARTIFEX SC - HT



Our material compositions are as individual as your requirements. The ideal composition of polyurethane, resin or rubber with the corresponding grain guarantees the perfect result. Regardless of whether initial equipment, tools with a long service live, economic variants or special glass: you decide what you need, we have the matching series.

THE LOW-E-GLASS PROS: SERIES T

Decoating requires special effort. This series with garnet, silicon carbide and regular aluminium oxide as abrasive grain decoates the layers on Low-E-Glass without leaving any residue.

EDGE PROFILES



Decoating of LOW-E and Solar glass

MACHINES

Manual Machines | Vertical Machines Cutting Tables | Shape cutting tables

TOOL

Procuct :	ARTIFEX SC 150 HT
Bonding :	Foamed polyurethane
Grain :	Silicon carbide 150
Hardness :	Hard elastic
Colour :	Green
Delivery form :	Peripheral wheels with
	core Mounted points
	Sleeves

Dimension :


Ø 20 - 300 mm PRODUCT CODE EXAMPLE Bonding : Hardness : Grain : Type of grain : ARTICLE : SC 150 Η Т

RESULT **ADVANTAGE**

Perfect coating removal

Always pass the butterfly test with absolutely certainty

The selection of the right composition depends on the layer to be stripped and the number of metal layers. Each manufacturer offers its own types of Low-E-Glass. To meet the requirements of varying suppliers, such as AGC, Guardian, Interpane or Saint-Gobain, ARTIFEX produces grinding disks that differ with respect to grain size, type of abrasive grain and bonding strength.

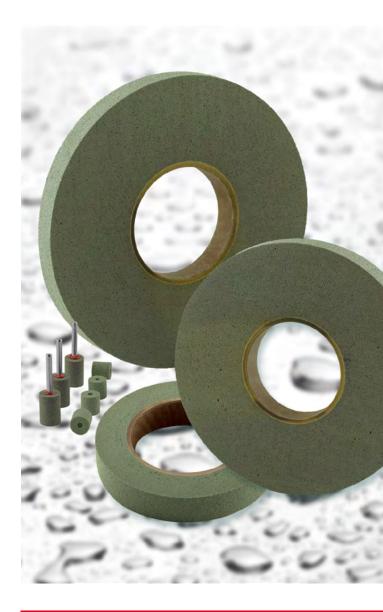

The ARTIFEX promise

We stand for tools that guarantee the highest guality standards. All ARTIFEX products are "Made in Germany" and their above-average service life speaks for itself.

Our service: You have individual requirements, we offer customised solutions regardless of the material, shape or dimensions. We will gladly advise you on your premises.